


Lifting station Minilift S KTP 300-S1, Floor slab, tileable

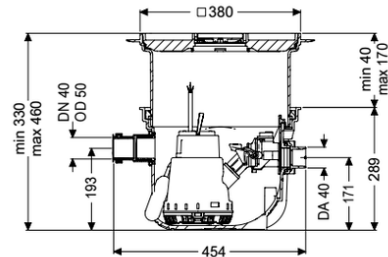

Article information

Item no.: 280570X
 GTIN: 4026092082546
 Price group: 20

Advantages

- Space-saving installation in the floor slab with integrated drainage function
- System ready to plug in
- Easy tool-free maintenance

Description

The ready to plug in small lifting station for faecal-free wastewater is suitable for wastewater drainage of individual sanitary appliances. The submersible pump with float switch can be removed easily with the help of one-handed closures. The collection tank made of polymer (PE) has an open pump tank and is resistant to aggressive wastewater. The system for installation in the floor slab is preassembled for final installation on site.

Variant

| | |
|-----------------------|--------------|
| Type of system: | Single unit |
| Rim width: | Float switch |
| Backwater protection: | integrated |

General characteristics

| | |
|-------------------------|---|
| Colour: | grey |
| Standard: | EN 12050-2 |
| Type of wastewater: | without sewage |
| Installation situation: | floor slab installation |
| Delivery state: | Installation-ready (connection parts must be connected on site) |

Dimensions

| | |
|---------------------|--------------|
| Net weight: | 10,52 kg |
| Gross weight: | 11,66 kg |
| Installation depth: | 330 - 460 mm |

| | |
|--|--------------------------------|
| Length: | 460 mm |
| Width: | 380 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |
| Tank/drain body | |
| Pressure pipe connection (DN): | 32 |
| Pressure pipe connection (OD): | 40 mm |
| Inlet nominal size (DN): | 60 mm |
| Inlet nominal size (DN): | 50 mm |
| Pumping volume: | 7 l |
| Coverage features | |
| Type of cover: | tileable cover plate |
| Cover material: | Polymer |
| Colour of cover: | silver grey |
| Width of cover: | 366 mm |
| Length of cover: | 366 mm |
| Cover locking: | Lock & Lift |
| Load class: | K 3 (EN 1253-1) |
| Max. flooring height: | 16 mm |
| Pumping device | |
| Pump control: | KTP 300 |
| Number of pumps: | 1 |
| Connection type: | Schuko (earthed contact) 2-pin |
| Rated current: | 1,6 A |
| Length of mains cable for pump: | 5 m |
| Protection class control unit: | IP 68 (3m) |
| DSC: | integrated |
| Max. temperature (permanent) of conveyed material: | 40 °C |
| Hot water resistance for a short time (2 min): | 80 °C |
| Max. pumping capacity: | 8 m³/h |
| Max. pumping height: | 6 m |
| Speed: | 2800 U/min |
| Power P1: | 0,34 kW |
| Power P2: | 0,21 kW |
| Operating mode: | S1 |
| Type of fuse required (electrical protection): | C 16 A |
| Type of pump connection cable: | H07RN-F 3G 1.5 mm² |
| Impeller type: | Multi-vane impeller |
| Free passage: | 10 mm |
| Control | |
| Mains frequency: | 50 Hz |
| Operating voltage: | 230 V |
| Connection type: | Schuko (earthed contact) 2-pin |
| Rated current: | 1,6 A |